

Ultra Slim Flood Light



 **ZNERGY**[®]
The LED Revolution

The IKIO Ultra Slim Flood Light has aluminum alloy composition rugged die cast design with integrated cooling fins to ensure operating at optimum temperature. Compact structure and light weight.

Features

- Solid die-cast aluminum housing
- Bronze UV stabilized powder coat finish
- Heat and impact resistant tempered glass
- IP65
- 100,000 Hour rated life at L70
- Low starting temperature -40°C
- Multi-volt (100 – 277V) input
- 10-Year Manufacturer's Warranty

800-931-5662 . Sales@ZnergyWorld.com

Powered by
 **ikio**
LED LIGHTING




Product Code	IK-FLUS-L130-XXX-XX SVX				
Power Consumption (W)	100	120	150	200	240
Lumen Output (Lm)	13000±5%	15600±5%	19500±5%	26000±5%	31200±5%
Lumen Efficacy (Lm/W)	130±5%				
CCT (K)	3000±5%		4000±5%		5500±5%
Color Rendering Index (CRI)	>70				
AC Input Rating (VAC)	AC 100-277V 50/60Hz				
Dimming (0-10V)	Optional				
PF	≥ 0.90				

ORDERING INFORMATION


MODEL	LUMEN EFFICACY	POWER	CCT
IK-FLUS	L130	0100	30
		0 - 100 W	30 - 3000K
		0 - 120 W	40 - 4000K
		0 - 150 W	55 - 5500K
		0 - 200 W	
		0 - 240 W	

100W

Radiation Diagram

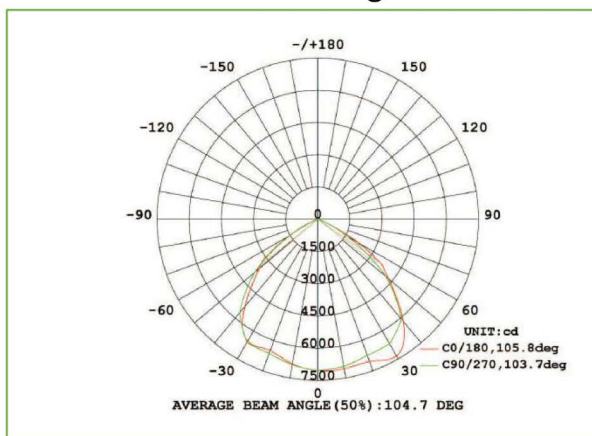


LUX Diagram

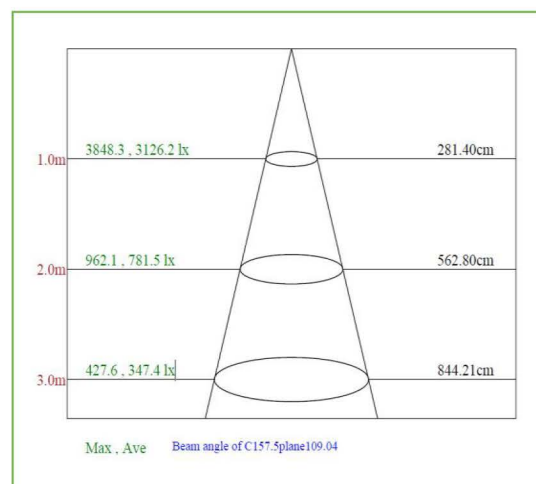


150W

Radiation Diagram

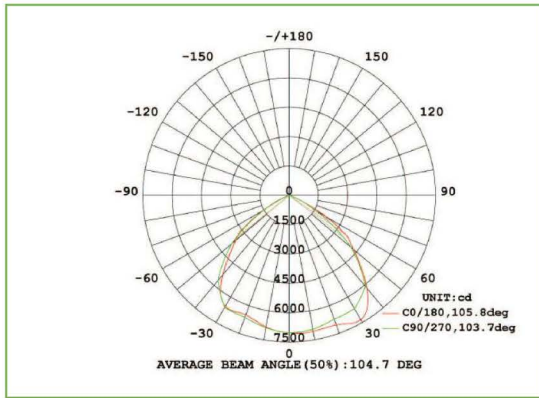


LUX Diagram

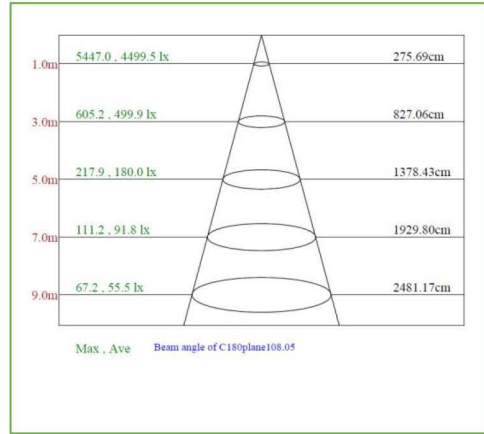


200W

Radiation Diagram

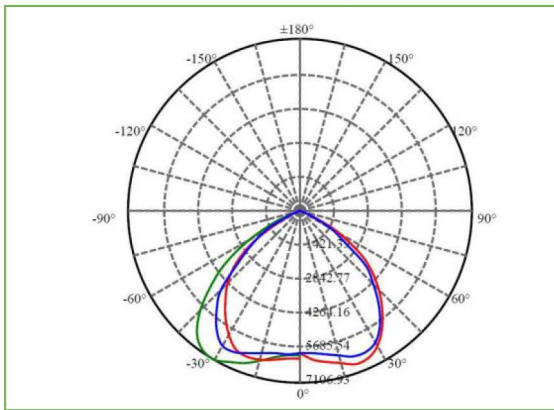


LUX Diagram

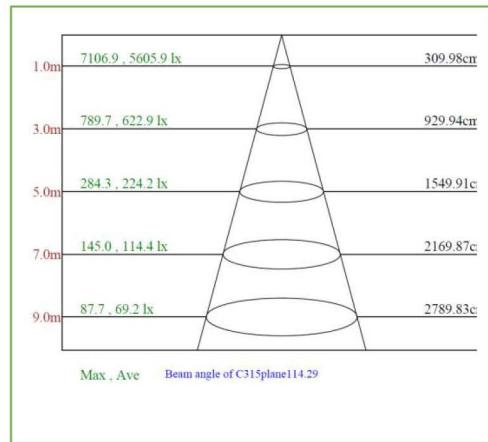

240W

Radiation Diagram

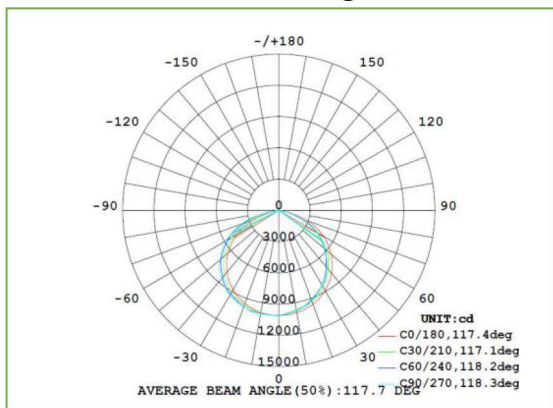

LUX Diagram

