

Explosion Proof High Bay LED Fixture



 **ZENERGY**[®]
The LED Revolution

The IK10 Explosion Proof High Bay series is made of a copper free aluminum alloy body with a special heat dissipating design that's powder coated for added durability.

Specially designed to dissipate heat increasing efficiency and LED life span
Suitable for wet and hazardous location
IP 67 Waterproof
UL listed/CUL listed
System Efficacy: >130Lm/W
Efficacy CRI 80+
100,000 Hour rated life
Low starting temperature -40 Deg C
Multi-volt (90-277)V input
10-Year Limited Warranty

Class I Div I, Class I Div II, Class II Div I, Class II Div II

800-931-5662 . Sales@ZenergyWorld.com



Powered by




Product Code	IK-HBEP-L130-XXX-XX PVX					
Size (ft)	1.30 x 0.94 x 0.83					
Power Consumption (W)	80	100	120	150	180	200
Lumen Output (Lm)	10400±5%	13000±5%	15600±5%	19500±5%	23400±5%	26000±5%
Lumen Efficacy (Lm/W)	130±5%					
CCT (K)	5000±5%		6000±5%		6500±5%	
Color Rendering Index (CRI)	80+					
AC Input Rating (VAC)	AC 90-277V 50/60Hz					
Dimming (0-10V)	Optional					
PF	≥ 0.90					

ORDERING INFORMATION

MODEL	LUMEN EFFICACY	POWER	CCT
IK-HBEP	L130	080	50
		0 - 080 W	50 - 5000K
		0 - 100 W	60 - 6000K
		0 - 120 W	65 - 6500K
		0 - 150 W	
		0 - 180 W	
		0 - 200 W	

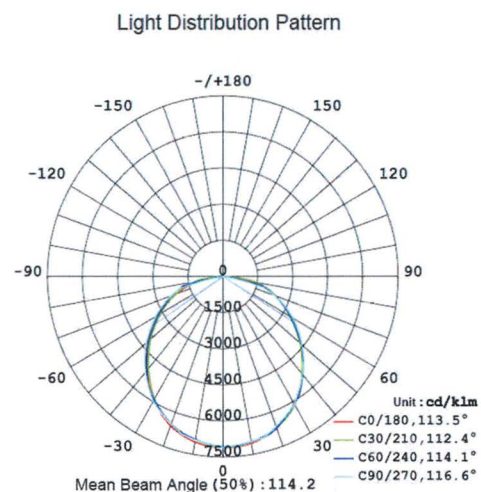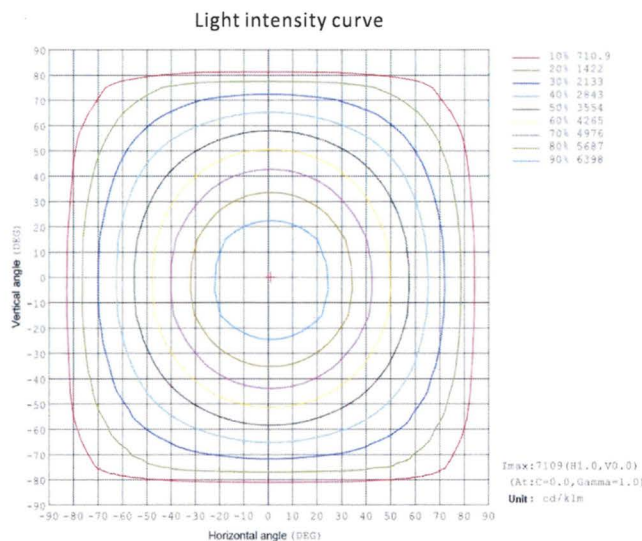

Class I Div I, Class I Div II, Class II Div I, Class II Div II

