


ARCHITECTURAL RETROFIT SERIES 2 X 2

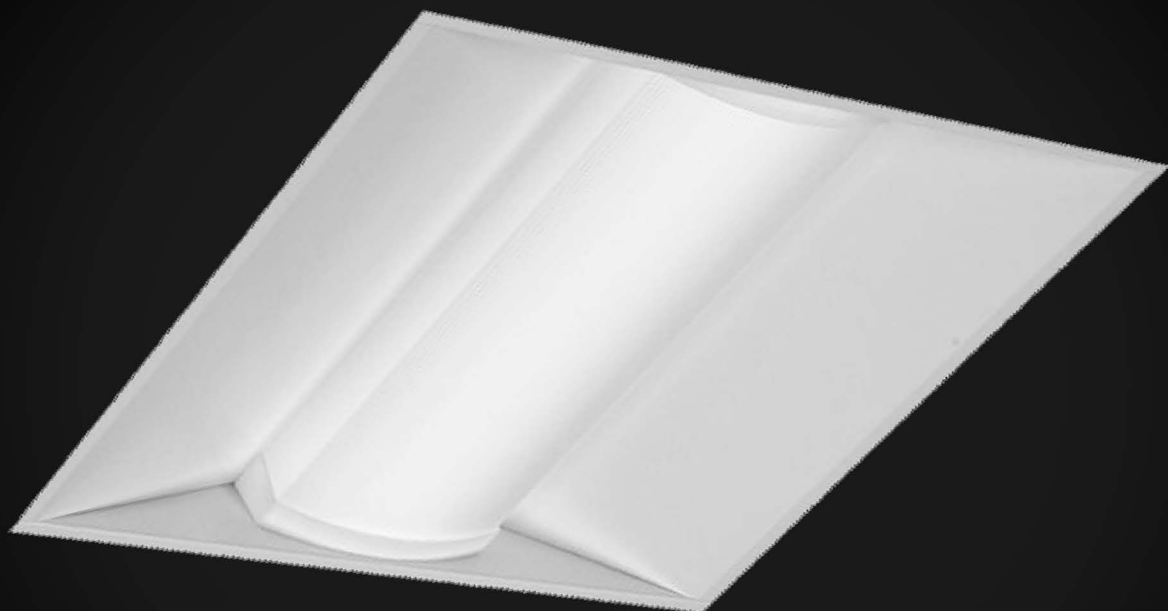

The IKIO Retrofit Troffer is the ideal LED retrofit option for existing 2'x2' fluorescent troffers, with a clean, contemporary look. Designed for rapid, tool less installation and long life, the retrofit troffer provides maintenance-free, uniform lighting with standard 0-10V dimming capability. The glare-free PC lens is easily removable for cleaning, with a life expectancy of over 100,000 hours. With multiple wattage and lumen packages performing at 130 Lm/W, Retrofit troffer is among the most efficient retrofit option available.

Features

- Average efficacy of 130+ Lm/W
- Suitable For Damp Locations
- Over 100,000-hours of lifetime at L70
- 80+ CRI
- 0-10V dimming (optional)
- Expected Life Over 100,000 Hrs
- 10-Year Manufacturer's Warranty
- LM79/LM80/TM-21 data available (on request)
- Toolless Easy Installation

800-931-5662 . Sales@ZnergyWorld.com

Powered by



Internal Product Code	IK-RT22-L130-XXXX-DY-XX			
Size (ft)	2 X 2			
Power Consumption (W)	25	36		
Lumen Output (Lm)	3250 ± 5%	4680 ± 5%		
Lumen Efficacy (Lm/W)	130 ± 5%			
CCT (K)	3000 ± 5%	3500 ± 5%	4000 ± 5%	5700 ± 5%
Color Rendering Index (CRI)	80+			
AC Input Rating (vAC)	AC 100-277v 50/60Hz			
Dimming (0-10v)	Yes			
PF	≥ 0.90			

ORDERING INFORMATION

DLC LISTING AND NOMENCLATURE

25W


DLC PRODUCT CODE	DLC PRODUCT ID
IK-RT22-0025-X-DY-40-J	P651FI27
IK-RT22-0025-X-DY-50-J	P1P2G7WS

36W

DLC PRODUCT CODE	DLC PRODUCT ID
IK-RT22-0036-X-DY-30-J	PGDW574U
IK-RT22-0036-X-DY-35-J	PXEUQEGR
IK-RT22-0036-X-DY-40-J	P7CKA9U2
IK-RT22-0036-X-DY-50-J	PAIVFVTK

Optometric Data

IK-RT22-L130-0025-DY-XX

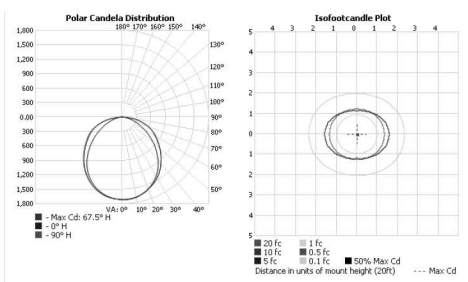

IK-RT22-L130-0036-DY-XX

