


Premium Flood Light

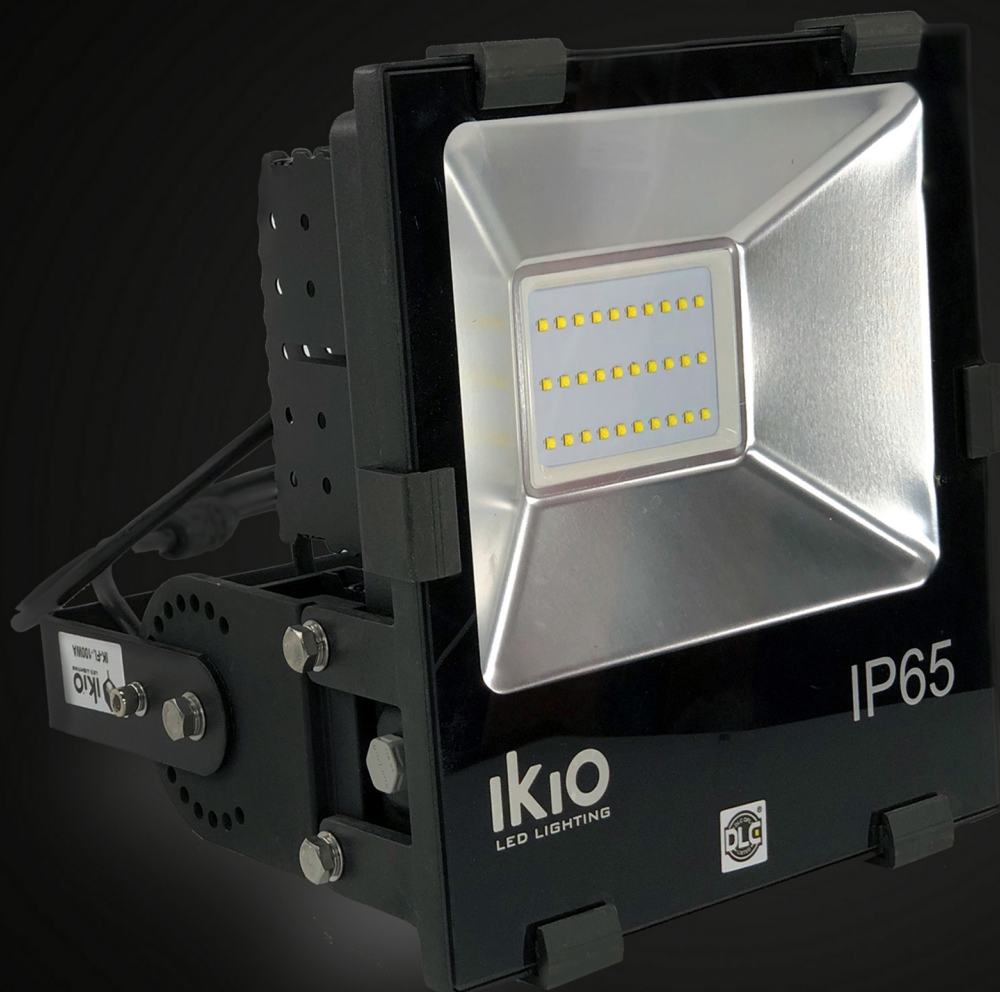

ZENERGY
The LED Revolution

The IKIO Stadium Flood Light has a rugged die cast design with integrated cooling fins to ensure operations at optimum level temperature. It replaces up to 400W HID.

Features

- IP65 rated
- Low Starting Temperature
- Heat and impact resistant tempered glass
- 10-Year Manufacturer's Warranty
- 100,000-hours of lifetime at L70

800-931-5662 . Sales@ZnergyWorld.com

Powered by
ikio
LED LIGHTING




Product Code	IK-FLS1-LXXX-XXX-XX XXX						
Power Consumption (W)	40W	50W	70W	100W	150W	200W	250W
Lumen Output (Lm)	3000±5%	5000±5%	7000±5%	10000±5%	15000±5%	20000±5%	25000±5%
Lumen Efficacy (Lm/W)	75±5%	100±5%	100±5%	100±5%	100±5%	100±5%	100±5%
Beam angles	120						
CCT (K)	3000, 4000, 5000K						
AC Input Rating (VAC)	AC 90-277V 50/60Hz						
Color Rendering Index (CRI)	>90						
PF	≥ 0.90						

ORDERING INFORMATION

MODEL **LUMEN EFFICACY** **POWER** **CCT**
IK-FLS1 - **L100** - **40** - **30**


- 0 - 40 W
 - 0 - 50 W
 - 0 - 70 W
 - 0 - 100 W
 - 0 - 150 W
 - 0 - 200 W
 - 0 - 250 W
- 30 - 3000K
 - 40 - 4000K
 - 50 - 5000K

Radiation Diagram

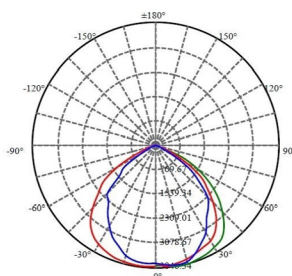


IK-SP-FL-30WB

LUX Diagram

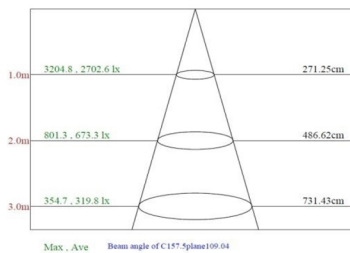


Radiation Diagram

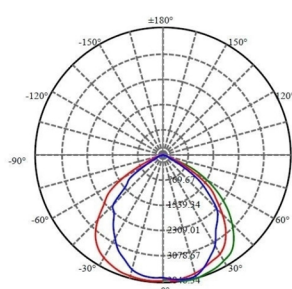


IK-SP-FL-50WB

LUX Diagram

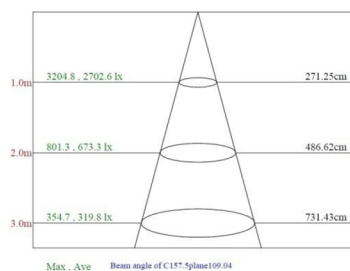


Radiation Diagram

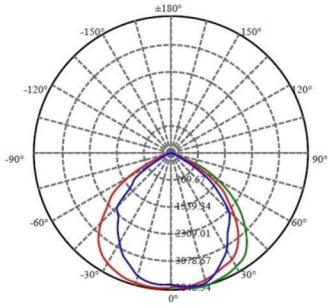


IK-SP-FL-70WB

LUX Diagram

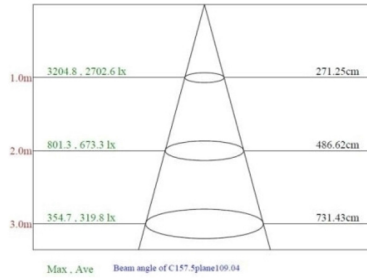


Radiation Diagram

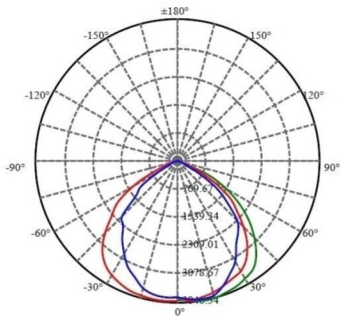


IK-SP-FL-100WB

LUX Diagram


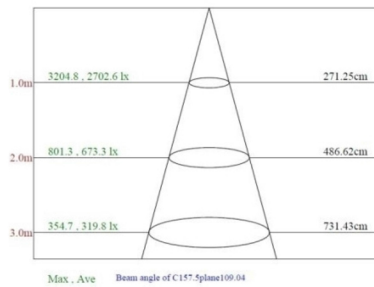


Radiation Diagram

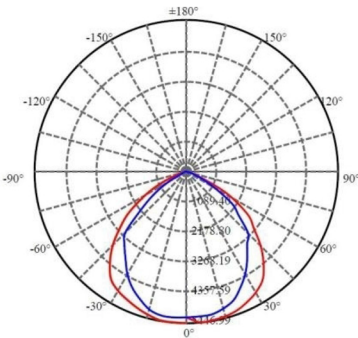


IK-SP-FL-150WB


LUX Diagram

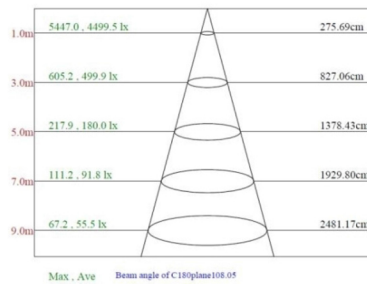


IK-SP-FL-30WB




IK-SP-FL-50WB




IK-SP-FL-70WB



IK-SP-FL-100WB



IK-SP-FL-150WB



IK-SP-FL-200WB

