

Wall Pack Series 04



The IKIO Wall Pack Series-04 is the best energy efficient lighting option for wall-mounted security lighting and building facade lighting. IKIO's Wall Packs offer reduced energy consumption and eliminate the need for frequent bulb and ballast replacements that are commonly found with Wall Packs that contain Metal Halide and High Pressure Sodium bulbs.

Features

- Solid die-cast aluminum housing
- Photocell available(optional)
- Heat and impact resistant tempered glass
- Multiple mounting options
- 80+ CRI
- IP65 Rated
- 10-Year Manufacturer's Warranty
- Low starting temperature -40oC
- Multi-volt (100 -277V) input
- 100,000 hours lifetime at L70
- Average efficacy of 110 Lm/W

800-931-5662 • Sales@ZnergyWorld.com




Technical specification


Internal Product Code	IK-WPS4-L120-XXXX-DN-XX					
Size (mm)	-					
Power Consumption (W)	20	30	60	80		
Lumen Output (Lm)	2400 ± 5%	3600 ± 5%	7200 ± 5%	9600 ± 5%		
Lumen Efficacy (Lm/W)	120 ± 5%					
CCT (K)	3000 ± 5%	3500 ± 5%	4000 ± 5%	4500 ± 5%	5000 ± 5%	5700 ± 5%
Color Rendering Index (CRI)	80+					
AC Input Rating (vAC)	AC 100-277v 50/60Hz					
Dimming (0-10v)	No					
PF	≥ 0.90					

Optometric Data

IK-WPS4-L120-0020-DN-XX

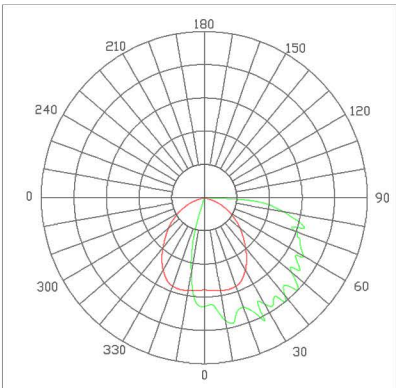

IK-WPS4-L120-0030-DN-XX

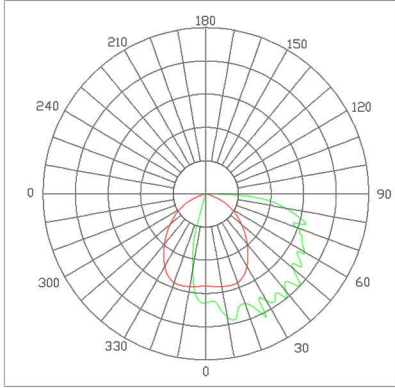

IK-WPS4-L120-0080-DN-XX

